

S8VK POWER SUPPLIES

Reliable and easy operation - worldwide



- » The most compact design on the market
- » Resistant in tough environments
- » Easy and fast installation



Compact power supplies...

Omron has developed a new and exciting family of compact power supplies. With the same high quality and practical design that made our previous series safe, reliable, and easy to install, the new S8VK series is even tougher, more compact and easier to use. Omron is a world leader in the development and manufacture of industrial power supplies. We launched our first compact product, the S82K, in 1987 and our S8VS compact series has been an automatic choice with customers since 2002.

To ensure that we provide the perfect solution

to match every customer's need, Omron has launched 3 different families: the cost effective S8VK-C, the standard S8VK-G, and the top of the range S8VK-R (redundancy unit).



...that make a world of difference!



Three compelling reasons why the S8VK is the right power supply for you:

Tough Resistant in tough environments

Omron is confident that the quality of the S8VK will exceed your highest expectations. Its robust design and construction withstand the harshest environments and provide stable operation over a wide operating temperature range. Because of high MTBF figures, your S8VK power supply will keep running when others fail.

Easy Easy and fast installation


The S8VK series not only offers you greater flexibility when designing your machine, it also saves you time and reduces costs thanks to the minimal wiring requirements and easy one-handed mounting provided by the enhanced DIN-rail mounting clip.

Compact The most compact design on the market

Designed with space saving in mind, the S8VK series is our most compact power-supply range ever and the most compact available on today's market.

Resistant to tough environments

Wherever the S8VK is installed, it will give the same reliable performance for the duration of its service life. The wide operating temperature range of between -40 to +70°C guarantees stable operation in any environment where other power supplies may be found lacking. But its robust design advantages don't end there because the S8VK also offers high resistance to the vibration transmitted by machinery in close proximity, this is due to the vibration-resistant DIN-rail mounting clip.

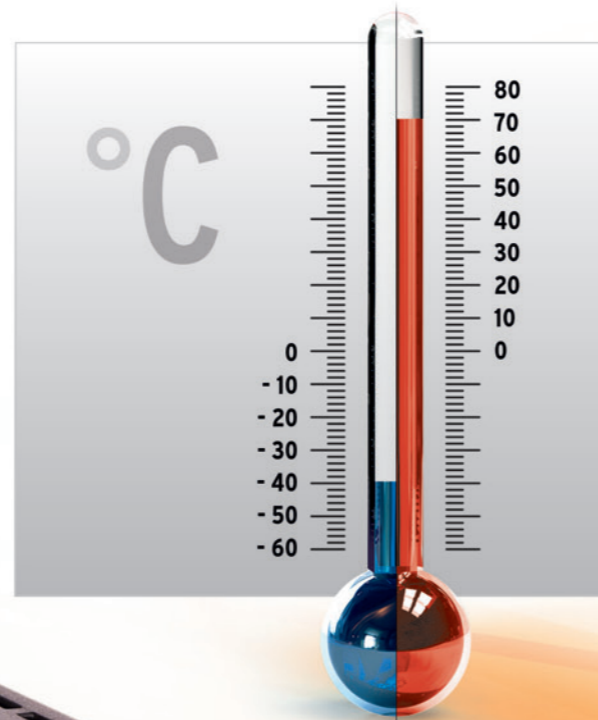

Easy and fast installation

Making your life easier

Simply click onto a standard DIN rail using one hand to mount in a flash. Effortless and time saving! In addition, the S8VK features a double set of DC output terminals (three for the negative terminal), which means you also spend less time and effort on wiring.



Click





Long-life guaranteed

Designed to international safety standards for global markets, the S8VK even has approvals for marine applications and carries a full, across-the-board, warranty on all models no matter which country your machine is exported to! Because of high MTBF figures, the S8VK power supply will keep running when others fail.

The most compact design on the market

Designed with downsizing in mind

Omron knows that size is important for machine designers, which is why we have applied our exclusive thermal simulation software during the design of the S8VK. This gives a high power density in a compact package that is 13% smaller than comparable power supplies and the smallest on the market for its type. And the S8VK has an even sleeker exterior than any previous models.

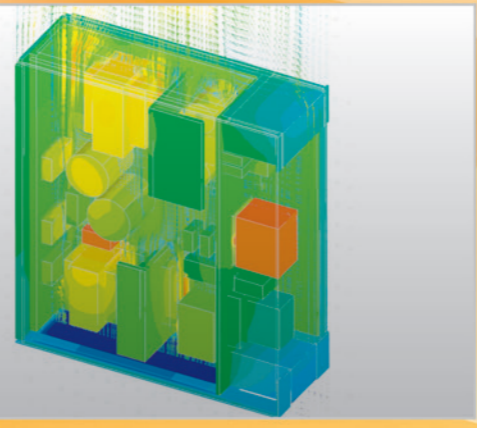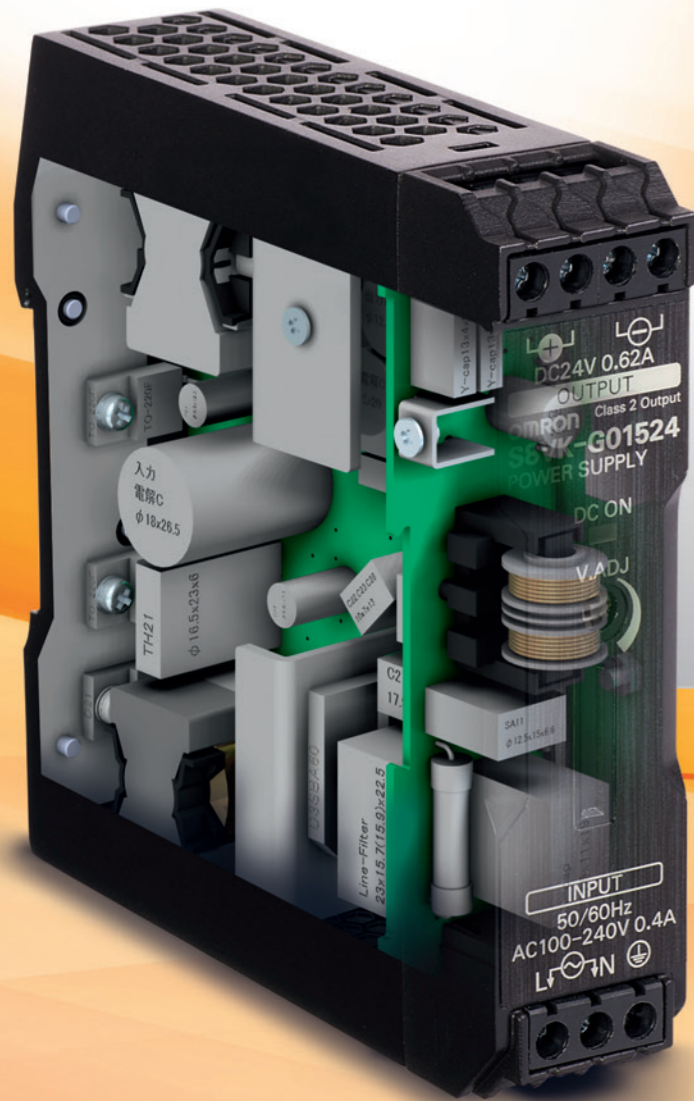

Thermal view

Component view

The 361° Approach

The perfect match for your needs

To ensure that we have the perfect solution to match every need, Omron offers three different families:

- The cost effective S8VK-C Lite line with uncompromising quality.
- The standard S8VK-G Pro Line, our “install & forget” option, offering longer lifetime, higher protection and more features.
- The top of the range S8VK-R Pro plus (redundancy unit) designed for specific applications and special demands.

Our new 361° Approach not only provides a complete all-round offering, it also puts you at the very centre of the product selection process. It’s an approach that leads to a Perfect Match – one with the extra degree of confidence that comes from choosing Omron.

| Featuring | LITE S8VK-C | PRO S8VK-G | PROplus |
|-----------------------|----------------------|---|--|
| CE & Safety standard | CE, EN60950-1, cURus | CE, EN60950-1, EN50178, cULus, cURus | For high reliability redundancy system Features 1. Redundancy OK LED 2. Voltage balance supporter LED 3. Signal output for the status confirmation. |
| INPUT | 100-240 VAC | 100-240VAC, 90-350VDC | |
| Operation Temperature | -20 to 60 °C | -40 to 70 °C | |
| EMI | EN55011 Class A | EN55011 Class B | |
| EN 61000-3-2 | No | Yes | |
| Parallel Operation | No | Yes | |
| Following Standards | No | Safety transformer, EN561558-2-16, EN60204-1 PELV | |
| Additional features | No | Power Boost 120% | |



Ordering information

S8VK-G series



| Type | Power ratings | Input voltage | Output voltage | Output current | Size (W × H × D) [mm] | Order code |
|------------------------------|---------------|--|----------------|----------------|-----------------------|-------------|
| Power supply Single phase | 15 W | 100 to 240 VAC Allowable range: 85 to 264 VAC, 90 to 350 VDC, 2 phases less than 240 VAC | 5 V | 3 A | 22.5 × 90 × 90 | S8VK-G01505 |
| | | | 12 V | 1.2 A | | S8VK-G01512 |
| | | | 24 V | 0.65 A | | S8VK-G01524 |
| | 30 W | | 5 V | 5 A | 32 × 90 × 90 | S8VK-G03005 |
| | | | 12 V | 2.5 A | | S8VK-G03012 |
| | | | 24 V | 1.3 A | | S8VK-G03024 |
| | 60 W | | 12 V | 4.5 A | 32 × 90 × 110 | S8VK-G06012 |
| | | | 24 V | 2.5 A | | S8VK-G06024 |
| | 120 W | | 24 V | 5 A | 40 × 125 × 113 | S8VK-G12024 |
| | | | 24 V | 10 A | | S8VK-G24024 |
| | 240 W | | 48 V | 5 A | 60 × 125 × 140 | S8VK-G24048 |
| | | | 24 V | 20 A | | S8VK-G48024 |
| 480 W | 48 V | 10 A | 95 × 125 × 140 | S8VK-G48048 | | |

S8VK-C series



| Type | Power ratings | Input voltage | Output voltage | Output current | Size (W × H × D) [mm] | Order code |
|------------------------------|---------------|---|----------------|----------------|-----------------------|-------------|
| Power supply Single phase | 60 W | Single phase 100 to 240 VAC (Allowable range: 85 to 264 VAC) | 24 V | 2.5 A | 32 × 90 × 110 | S8VK-C06024 |
| | 120 W | | 24 V | 5 A | 40 × 125 × 113 | S8VK-C12024 |
| | 240 W | | 24 V | 10 A | 60 × 125 × 140 | S8VK-C24024 |
| | 480 W | | 24 V | 20 A | 95 × 125 × 140 | S8VK-C48024 |

S8VK-R series



| Type | Input voltage | Output current | Size (W × H × D) [mm] | Order code |
|-------------------|---------------|----------------|-----------------------|------------|
| Redundancy Module | 5 to 30 VDC | 10 A | 32 × 90 × 110 | S8VK-R10 |
| | 12 to 60 VDC | 20 A | 40 × 125 × 113 | S8VK-R20 |

Specifications

S8VK series

| Type | S8VK-G | |
|------------------------|---------------------------------|---|
| Efficiency (Ave) | 90% | |
| Input | Rated Input Voltage | 100 to 240 VAC |
| | Allowable range | 85 to 264 VAC, 90 to 350 VDC 2 phases less than 240 VAC |
| | Harmonic current emissions | Conforms to EN61000-3-2 |
| | Leakage current at 200 VAC | 1 mA max |
| | Inrush current at 230 VAC | 40 A max |
| Output | Voltage adjustment range | -10% to 15% (with V.ADJ) |
| | Ripple | 2.0% (p-p) max. (at rated input/output voltage) |
| | Input variation influence | 0.5% max. (at 85 to 264 VAC input, 100% load) |
| | Load variation influence | 3.0% max. (5 V), 2.0% max. (12 V), 1.5% max. (24, 48 V), at 0% to 100% load |
| | Temperature variation influence | 0.05%/°C max. |
| | Start up time | 1,000 ms max |
| | Hold time | 20 ms min |
| | Additional functions | Overload protection |
| Power Boost | | 120% of rated current * Refer to "Power Boost function" |
| Overvoltage protection | | Yes |
| Parallel operation | | Possible for up to 2 units |
| Series operation | | Possible for up to 2 units |

| Type | S8VK-G | |
|--------|--|--|
| Others | Operating ambient temperature | -40 to 70°C (-40 to 158°F) * Refer to "Derating Curve" |
| | Storage temperature | -40 to 85°C (-40 to 185°F) |
| | Operating ambient humidity | 25% to 95% (Storage humidity: 25% to 95%) |
| | Dielectric strength (detection current: 20 mA) | 3.0 kVAC for 1 min. (between all inputs and outputs) 2.0 kVAC for 1 min. (between all inputs and PE terminal) 1.0 kVAC for 1 min. (between all outputs and PE terminal) |
| | Insulation resistance | 100 MΩ min. (between all outputs and all inputs/ PE terminals) at 500 VDC |
| | Vibration resistance | 10 to 55 Hz, 0.375-mm single amplitude for 2 h each in X, Y, and Z directions 10 to 150 Hz, 0.35-mm single amplitude (5 G max.) for 80 min. each in X, Y, and Z directions |
| | Shock resistance | 150 m/s ² , 3 times each in ±X, ±Y, and ±Z directions |
| | Output indicator | Yes (color: green), lighting from 80% to 90% of rated voltage |
| | EMI | Conforms to EN61204-3, EN55011 Class B |
| | EMS | Conforms to EN61204-3 high severity levels |
| | Approved Standards | UL: UL508 (Listing), UL60950-1, cUL: CSA C22.2 No.107.1 and No.60950-1, EN/VDE: EN50178 (=VDE0160), EN60950-1 (=VDE0805) Marin approval (Lloyd's Register) UL1310 Class 2 output for 15W, 30W, 60W |
| | Fulfilled Standards | SELV (EN60950/EN50178/UL60950-1), PELV (EN60240-1,EN50178), Safety of Power Transformers (EN61558-2-16) EN50274 for Terminal parts |
| | Degree of protection | IP20 by EN/IEC60529 |
| | SEMI | F47-0706 (200 to 240 VAC) |

S8VK-C series

| Type | S8VK-C | |
|----------------------|-------------------------------|--|
| Efficiency (Ave) | 87% | |
| Input | Rated Input Voltage | 100 to 240 VAC |
| | Allowable range | 85 to 264 VAC |
| | Inrush current at 230 VAC | 40 A max |
| Output | Voltage adjustment range | -10% to 10% (with V.ADJ) |
| Additional functions | Overload protection | Yes |
| | Overvoltage protection | Yes |
| Others | Operating ambient temperature | -20 to 60°C (-4 to 140°F) |
| | Storage temperature | -25 to 65°C (-13 to 149°F) |
| | Output indicator | Yes |
| | EMI | Conforms to EN61204-3, EN55011 Class A |
| | EMS | Conforms to EN61204-3 high severity levels |
| | Approved Standards | UL: UL508 (Listing), UL60950-1, cUL: CSA C22.2 No.107.1 and No.60950-1, EN/VDE: EN50178 (=VDE0160), EN60950-1 (=VDE0805) |
| | Degree of protection | IP20 by EN/IEC60529 |

S8VK-R Series (Redundancy Units)


| Type | S8VK-R10 | S8VK-R20 |
|-----------------------------|--|--------------------------------|
| Rated Input Voltage | 5 to 30 V | 12 to 60 V |
| Output Current | 10 A | 20 A |
| Voltage Drop | 1 V max at 10 A | 1 V max at 20 A |
| Operation Temperature range | -40 to 70°C | -40 to 70°C |
| Safety Standard | UL60950-1, UL508, cURus, cULus, EN50178, EN60950-1 | |
| Signal output (Only one) | 30 VDC 50 mA max by Photo MOS Relay | |
| Redundancy OK Display | LED, The function to know the both of PS operate normally. | |
| Balance check Display | LED, The function to help to get the balance of 2 unit PS output voltage | |
| Grounding terminal | - | Yes, One for Chassis grounding |

Specifications

S8VK-G Series

Power Boost Function

- Do not allow the boost current to continue for more than 10 seconds. Also, do not let the duty cycle exceed the following conditions. These conditions may damage Power supply.
- Ensure that the average current of one cycle of the boost current does not exceed the rated output current. This may damage Power Supply.
- Lessen the load of the boost load current by adjusting the ambient temperature and the mounting orientation.

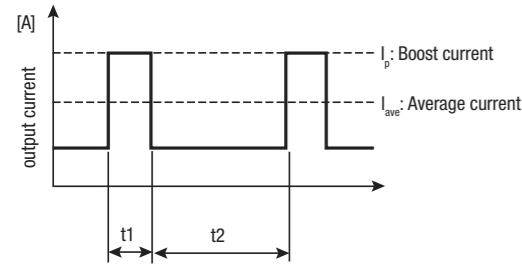

Defined condition for Power Boost availability.

- $t1 \leq 10$ s
- $I_p \leq$ Rated boost current
- $I_{ave} \leq$ Rated current

$$\text{Duty} = \frac{t1}{t1 + t2} \times 100 [\%] \leq 30\%$$


Terminals and Wiring

S8VK-G(15/30/60/120/240/480W)


| Model | INPUT | | OUTPUT | | PE | |
|-------------|---------------------|--|---------------------|--|---------------------|---|
| | American Wire Gauge | Solid Wire /Stranded Wire | American Wire Gauge | Solid Wire /Stranded Wire | American Wire Gauge | Solid Wire /Stranded Wire |
| S8VK-G01505 | AWG24 to 12 | 0.25 to 4 mm ² /0.25 to 2.5 mm ² | AWG20 to 12 | 0.5 to 4 mm ² /0.5 to 2.5 mm ² | AWG14 to 12 | 2.5 mm ² to 4 mm ² /2.5 mm ² 4 mm ² |
| S8VK-G01512 | | | AWG22 to 12 | 0.35 to 4 mm ² /0.35 to 2.5 mm ² | | |
| S8VK-G01524 | | | AWG24 to 12 | 0.25 to 4 mm ² /0.25 to 2.5 mm ² | | |
| S8VK-G03005 | AWG24 to 12 | 0.25 to 4 mm ² /0.25 to 2.5 mm ² | AWG18 to 12 | 0.75 to 4 mm ² /0.75 to 2.5 mm ² | AWG14 to 10 | 2.5 mm ² to 6 mm ² /2.5 mm ² 4 mm ² |
| S8VK-G03012 | | | AWG20 to 12 | 0.5 to 4 mm ² /0.5 to 2.5 mm ² | | |
| S8VK-G03024 | | | AWG22 to 12 | 0.35 to 4 mm ² /0.35 to 2.5 mm ² | | |
| S8VK-G06012 | AWG22 to 12 | 0.35 to 4 mm ² /0.35 to 2.5 mm ² | AWG18 to 12 | 0.75 to 4 mm ² /0.75 to 2.5 mm ² | AWG14 to 10 | 2.5 mm ² to 6 mm ² /2.5 mm ² 4 mm ² |
| S8VK-G06024 | | | AWG20 to 12 | 0.5 to 4 mm ² /0.5 to 2.5 mm ² | | |
| S8VK-G12024 | AWG22 to 10 | 0.35 to 6 mm ² /0.35 to 4 mm ² | AWG18 to 10 | 0.75 to 6 mm ² /0.75 to 4 mm ² | AWG14 to 10 | 2.5 mm ² to 6 mm ² /2.5 mm ² 4 mm ² |
| S8VK-G24024 | AWG20 to 10 | 0.5 to 6 mm ² /0.5 to 4 mm ² | AWG14 to 10 | 2.5 to 6 mm ² /2.5 to 4 mm ² | | |
| S8VK-G24048 | | | AWG18 to 10 | 0.75 to 6 mm ² /0.75 to 4 mm ² | | |
| S8VK-G48024 | AWG16 to 10 | 1.5 to 6 mm ² /1.5 to 4 mm ² | AWG12 to 10 | 4 to 6 mm ² /4 mm ² | AWG14 to 10 | 2.5 to 6 mm ² /2.5 to 4 mm ² |
| S8VK-G48048 | | | AWG14 to 10 | 2.5 to 6 mm ² /2.5 to 4 mm ² | | |

* Wires to be stripped: 8 mm

Derating Curve (As a reference)

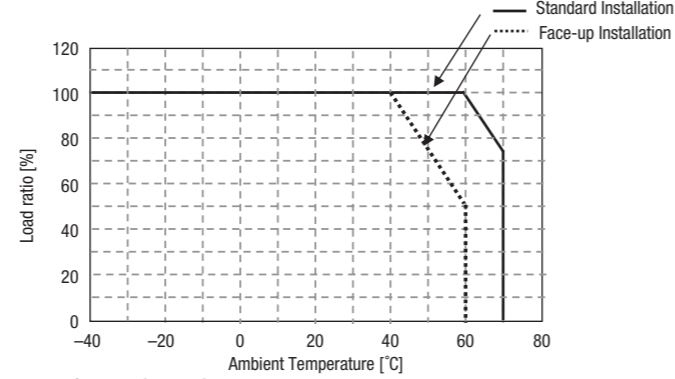

For Standard installation.
- 25 to 60°C (-13 to 140°F) at 100% load
Derating - 2.5% of load/K from 60 to 70°C (from 140 to 158°F)

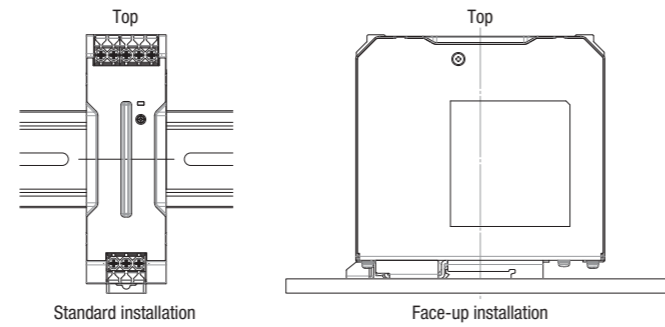

S8VK-G Nomenclature

| No. | Name | Function |
|-----|--|----------|
| 1 | AC Input terminals, (L) & (N) The fuse is located on the L side. | |
| 2 | PE (Protective earthing) Terminal. PE terminal stipulated in the safety standards is used. Connect fully to ground. | |
| 3 | DC output terminal (+V) + (-V) | |
| 4 | Output Indicator (DC ON: Green) | |
| 5 | Output Voltage Adjuster (V.ADJ) | |

S8VK-G Dimensions

| Model | Dimensions (mm) |
|-------------|-----------------------------|
| S8VK-G015 | 75.4 x 90 x 91 (Depth) |
| S8VK-G12024 | 104.6 x 125 x 122.2 (Depth) |
| S8VK-G030 | 75.4 x 90 x 91 (Depth) |
| S8VK-G240 | 104.6 x 125 x 151 (Depth) |
| S8VK-G060 | 75.4 x 90 x 111 (Depth) |
| S8VK-G480 | 52.3 x 125 x 151 (Depth) |

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.omron.eu

Austria

Tel: +43 (0) 2236 377 800
industrial.omron.at

Belgium

Tel: +32 (0) 2 466 24 80
industrial.omron.be

Czech Republic

Tel: +420 234 602 602
industrial.omron.cz

Denmark

Tel: +45 43 44 00 11
industrial.omron.dk

Finland

Tel: +358 (0) 207 464 200
industrial.omron.fi

France

Tel: +33 (0) 1 56 63 70 00
industrial.omron.fr

Germany

Tel: +49 (0) 2173 680 00
industrial.omron.de

Hungary

Tel: +36 1 399 30 50
industrial.omron.hu

Italy

Tel: +39 02 326 81
industrial.omron.it

Netherlands

Tel: +31 (0) 23 568 11 00
industrial.omron.nl

Norway

Tel: +47 (0) 22 65 75 00
industrial.omron.no

Poland

Tel: +48 22 458 66 66
industrial.omron.pl

Portugal

Tel: +351 21 942 94 00
industrial.omron.pt

Russia

Tel: +7 495 648 94 50
industrial.omron.ru

South Africa

Tel: +27 (0)11 579 2600
industrial.omron.co.za

Spain

Tel: +34 913 777 900
industrial.omron.es

Sweden

Tel: +46 (0) 8 632 35 00
industrial.omron.se

Switzerland

Tel: +41 (0) 41 748 13 13
industrial.omron.ch

Turkey

Tel: +90 212 467 30 00
industrial.omron.com.tr

United Kingdom

Tel: +44 (0) 870 752 08 61
industrial.omron.co.uk

More Omron representatives
industrial.omron.eu

Automation Systems

- Programmable logic controllers (PLC) • Human machine interfaces (HMI) • Remote I/O
- Industrial PC's • Software

Motion & Drives

- Motion controllers • Servo systems • Inverters

Control Components

- Temperature controllers • Power supplies • Timers • Counters • Programmable relays
- Digital panel indicators • Electromechanical relays • Monitoring products • Solid-state relays
- Limit switches • Pushbutton switches • Low voltage switch gear

Sensing & Safety

- Photoelectric sensors • Inductive sensors • Capacitive & pressure sensors
- Cable connectors • Displacement & width-measuring sensors • Vision systems
- Safety networks • Safety sensors • Safety units/relay units • Safety door/guard lock switches